


CP-ENC-T81PL3C

8MP IR Network Bullet Camera - 30Mtr.

- 1/2.7" 8MP PS CMOS Image Sensor (0.9407 centimeter)
- 3840(H) × 2160(V) @20fps
- H.265/H.264/MJPEG
- DWDR, BLC, 3D NR, White Balance
- 3.6mm Fixed lens (2.8mm optional)
- IR Range of 80 Mtr., POE, IP67
- Mobile Software: sMOB
- CMS Software: SVMS Pro
- Support Built in Mic

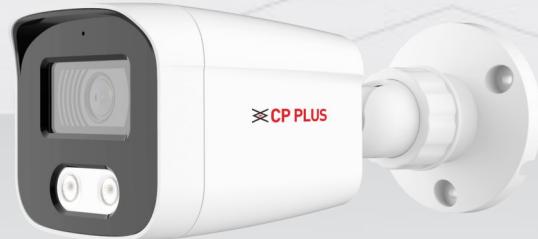

System Overview

With features of simple installation, easy operation, and high performance-cost ratio, This Series camera is applicable to small and medium-sized scenes, such as homes/residences, small-sized retail stores, and other small and medium-sized enterprises.

Functions

Live Viewing

Unlike some, this technology enables you to record the picture feed but view it live as well at your convenience. On top of that, the advantages of high-resolution video recording are numerous.



CP-ENC-T81PL3C

8MP IR Network Bullet Camera - 30Mtr.

Functions

True Day/Night (ICR)

When the scene is too dark, the image is captured by illuminating an infrared light through the camera onto the scene that greatly helps with making the scene visible for the lens. It delivers color images during the day and automatically switches to the monochrome feature as the scene darkens.

Power over Ethernet

This product uses the latest PoE technology to troubleshoot the occurrence of any issues in the system making it easier to use. With the help of this technology, your camera now only consumes energy directly from the power supply and doesn't require any mid-way switches.

About CP PLUS

The brand that is on its way to lead the world when it comes to the security and surveillance industry, CP PLUS, keeps bombarding the market with the most reliable range of products that have been designed carefully and methodically to automate the whole surveillance and security process, no matter how big your premises are.

It was the initiative to help the public in the area where they are the most vulnerable and to empower the sense of safety in our hearts that had conceptualized CP PLUS. And embarking on its mission to make the world a safer and more secure place has taken the brand's journey to unprecedeted levels even when compared to international competitors.



CP-ENC-T81PL3C

8MP IR Network Bullet Camera - 30Mtr.

Feature	Specification
Image Sensor	1/2.7" 8MP PS CMOS Image Sensor (0.9407 centimeter)
Effective Pixels	3840(H) x 2160(V)
Minimum Illumination	Color: 0.006 Lux @(F2.0, AGC ON), B/W: 0 Lux with IR
Shutter Speed	Auto: 1/3-1/100000 Sec
Gain Control(AGC)	Support
Lens	3.6mm Fixed Lens (2.8mm optional)
Max. Aperture	F1.6
S/N Ratio	60dB
Video Compression	H.265/H.264/MJPEG
Back Light Compensation	BLC/ DWDR
Angle of View	2.8 mm, horizontal FOV 111°, vertical FOV 61°, diagonal FOV 129° 3.6 mm, horizontal FOV 88°, vertical FOV 45°, diagonal FOV 110°
Frame Rate	Main Stream 1: 3840*2160@20fps / 3200*1800@20fps Main Stream 2: 2880*1620@30fps Main Stream 3: 1920*1080@30fps/1280*720@30fps Sub Stream 1: 720*480@20fps/720*480@30fps Sub Stream 2: 352*288@20fps/352*288@30fps
Motion detection	Support
Privacy Mask	3 Rectangular Zone
ROI	Support
Audio Compression	G711A,G711U,AAC
Image Config	Saturation, Brightness, Contrast, Sharpness, Mirror, 3D NR, White Balance, Anti Flicker, Video Tampering, HLC
TV System	PAL/NTSC
Protocol	TCP/IP,IPv4/v6, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTSP, NTP, SMTP, UDP, QoS,802.1x, ONVIF 19.12(Profile S/T), SNMP
Recording Mode	NVR/CMS/Web
Day/Night	Color/ B&W (IR-CUT)

Feature	Specification
Ethernet	RJ-45 (10/100Base-T)
Browser	IE8-11, Google Chrome, Firefox , Mac Safari
IR Power On	Smart, Manual & Timed mode
Smart Phone	iPhone, iPad, Android Phone
IR Cut Filter	Support
IR Control	Auto
IR	IR Range of 30 Mtr.
POE	Internal, Support IEEE 802.3af
Audio	Built-in MIC
Focus Control	Fixed
Warm Light	Support
Operating Temperature	-20°C ~ +60°C RH95% Max
IVS	Intrusion Detection, Line Cross Detection, Loiter Detection, People Gather Detection, Motion detection based on human detection, Corridor Pattern
Power Source	DC12V±10%, 700mA
Weatherproof Standard	IP67
Dimension	176.6mm x 67mm x 69.8mm
Casing	Plastic
Weight	370gm